
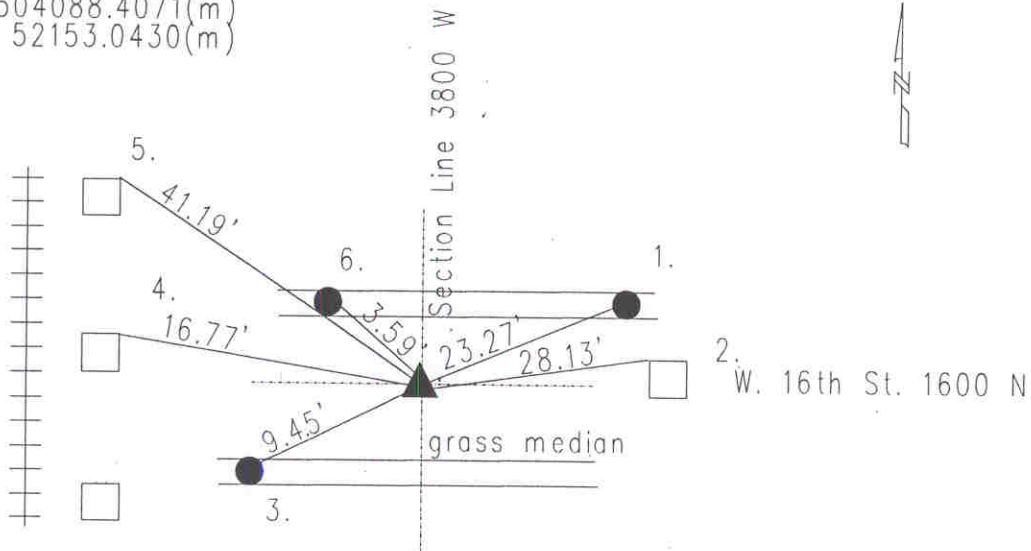


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 32 TOWNSHIP 16 RANGE 3
DATE: 10-17-2000
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 9-11-96

IN. S.P.C. E ZONE, NAD 83
NAME: 16033205
N: 504088.4071(m)
E: 52153.0430(m)

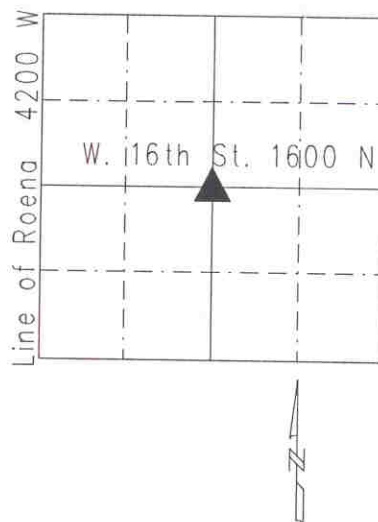

THIS CORNER POSITION REPRESENTS A "TITLE" CORNER AND MAY NOT NECESSARILY REPRESENT THE POSITION BASED ON RECORD CORNERS.

A survey by H. B. Fatout on June 4, 1879 indicates a set rock near N fence of gravel road with the following witnesses: 24" sycamore N 36 3/4 degrees; thence E 124 links; and 8" thorn S 83 1/4 degrees W 70 links per Wayne Township Legal Survey Book pg. 67. Monroe 8-3-53 called cut cross in pavement. Miller 1-5-76 called a 1" square brass plug. Gries 1-14-88 called 1 1" square brass plug. Wilcoxon 9-11-96 called a 1" square brass plug. Excavated 10-17-00 Wilcoxon set Harrison.

HC633205

| REF. | DISTANCE | DESCRIPTION |
|------|----------|------------------------------------|
| 1. | 23.27' | Mag nail w/brass washer curb inlet |
| 2. | 28.13' | NW corner of stone |
| 3. | 9.45' | Mag nail w/brass washer curb joint |
| 4. | 16.77' | NE corner of stone column |
| 5. | 41.19' | NE corner of stone column |
| 6. | 3.59' | Mag nail w/brass washer |
| | | |
| | | |
| | | |
| | | |
| | | |